




Dante™ PoE+ 8 x 30 W / Mid-Span Distributor



Dante™ PoE+ equiPOWER

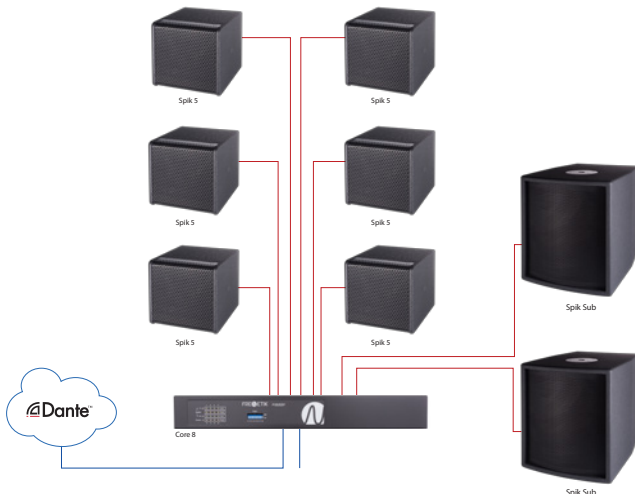

Reference	PS820DP
Standards	IEEE 802.3/u 10/100/1000BaseT/TX IEEE 802.3x Flow Control IEEE 802.3at/af PoE midspan PoE
Ports	Number of ports: 10 PoE ports: 8 PoE activation (On/Off): Dip-Switches
Ethernet switch features	MAC Address: 8K Buffer Memory: 128KB Store and Forward
Packet filtering/transmission speeds	100Mbps port - 1488,000pps 100Mbps port - 148800pps 10Mbps port - 14880pps
Network cables	100/1000BaseTx Cat. 5 UTP/STP 10BaseT Cat. 3, 4, 5 UTP/STP
Standard PoE wiring	4, 5, 7, 8
LED Indicators	Ports Link 1 to 8: 10/100 Mbps/s, PoE ON/OFF Ports Uplink 9 et10: 100/1000 Mbps/s For the device: Power
Power	Inputs : 100-240 VAC, 50~60 Hz Outputs : 56 VDC 4,46 A (250 W)
PoE power on each port	30 W
Dimensions	40 × 480 × 118 mm (H x W x D)
Weight	1.7 kg
Operating temperature range	0°C to 40°C
Storage temperature range	-20°C to 90°C
Humidity	10 to 90% (non-condensing)
Accessories	Rack mounting kit (supplied)
Certifications	FCC Class A, CE

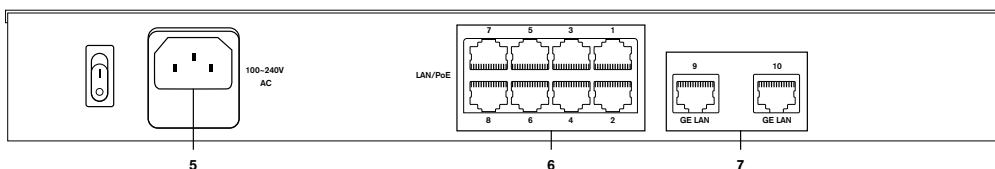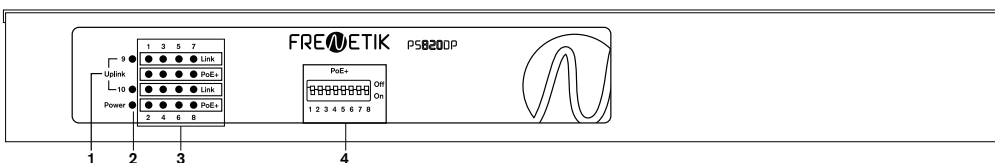

1. Uplink port operation indicator diodes
2. Mains power indicator diode
3. LEDs for individual indication of PoE power presence and operation of each output port
4. PoE Activation Dip-Switch for each output port
5. Mains power connector
6. Output Connectors
7. Input and copy connectors